




## Heating tapes

HEATING TAPE SURFACE TEMPERATURE UP TO 210 °C. CONFORMS TO VDE EN 60335-A.

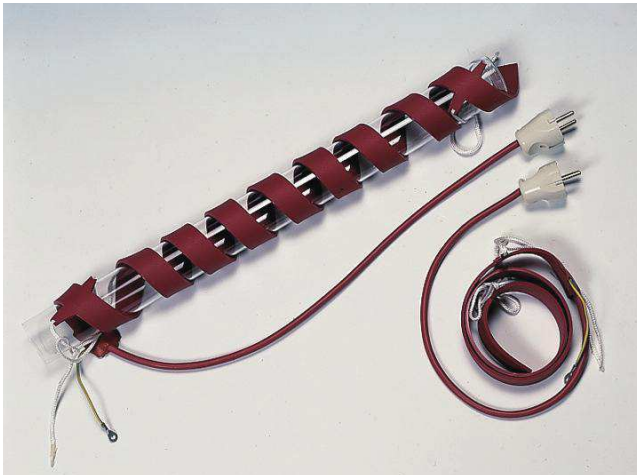

### FEATURES

Heating elements distributed homogeneously between flexible moulded sheets of silicon.

### APPLICATIONS

Used for heating small areas such as heating ducts for distillation, valves and pipes etc.

### MODELS

Part No.	Length m	Width mm	Power W
<b>3003178</b>	<b>0.80</b>	<b>25</b>	<b>180</b>
<b>3031710</b>	<b>1</b>	<b>25</b>	<b>210</b>
<b>3031715</b>	<b>1.5</b>	<b>25</b>	<b>265</b>



## Flexible heating cord



### FEATURES

For tape surface temperatures up to 180 °C. Thermally insulated using flexible silicon tube.

### APPLICATIONS

For heating small areas such as heating ducts, distillation, valves and pipes etc.

### MODELS

Part No.	Length m	Ø Cord mm	Power W
<b>1000781</b>	<b>1.5</b>	<b>3</b>	<b>45</b>
<b>1000782</b>	<b>3</b>	<b>3</b>	<b>90</b>
<b>1000783</b>	<b>6</b>	<b>3</b>	<b>180</b>
<b>1000784</b>	<b>12</b>	<b>3</b>	<b>360</b>



## Large surface area heating mats

MAT SURFACE TEMPERATURES UP TO 210 °C.  
CONFORMS TO VDE STANDARD EN 60335-A.



### FEATURES

The heating element is insulated and distributed homogeneously between two sheets of flexible moulded silicon.

Heating Power: 0.39 W cm<sup>2</sup>.

Mat surface temperature up to 210 °C.

Held in place by hooked spring fittings.

### APPLICATIONS

Suitable for heating drums up to 200 litres Ø 60 cm.

Total: 3 bands of 171 cm in length x 15 cm wide.

Power consumption 3000 W.

Part No. **4000200**

### ACCESSORIES

Controller (pages 293 and 294).