


## JOINTS

- In compliance with ISO 383/DIN 12249 Standards.
- Unprinted sockets to avoid getting printed charred
- Smooth grinding surface finish to avoid leakage

### Conical Joints

| Size   | Actual Dia of Wide End (mm) | Actual Dia of Narrow End (mm) | Nominal Length of Engagement (mm) |
|--------|-----------------------------|-------------------------------|-----------------------------------|
| 10/19  | 10.0                        | 8.1                           | 19                                |
| 12/21  | 12.5                        | 10.4                          | 21                                |
| 14/23  | 14.5                        | 12.2                          | 23                                |
| 19/26  | 18.8                        | 16.2                          | 26                                |
| 24/29  | 24.0                        | 21.1                          | 29                                |
| 29/32  | 29.2                        | 26.0                          | 32                                |
| 34/35  | 34.5                        | 31.0                          | 35                                |
| 40/38* | 40.0                        | 36.2                          | 38                                |
| 45/40  | 45.0                        | 41.0                          | 40                                |
| 50/42* | 50.0                        | 45.8                          | 42                                |
| 55/44* | 55.0                        | 50.6                          | 44                                |

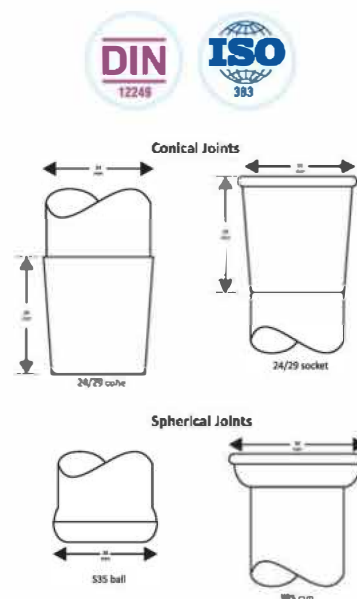

\* Non DIN

### Socket, Unprinted

| Item Code   | Socket Size | Approx. O.D. of tube (mm) | Total Length (mm) | Pack of |
|-------------|-------------|---------------------------|-------------------|---------|
| 001.202.02  | 10/19       | 13                        | 120±10            | 10      |
| 001.202.03  | 12/21       | 16                        | 120±10            | 10      |
| 001.202.04  | 14/23       | 18                        | 120±10            | 10      |
| 001.202.05  | 19/26       | 22                        | 125±10            | 10      |
| 001.202.06  | 24/29       | 28                        | 135±10            | 10      |
| 001.202.07  | 29/32       | 32                        | 135±10            | 10      |
| 001.202.08  | 34/35       | 38                        | 150±10            | 10      |
| 001.202.09* | 40/38       | 45                        | 150±10            | 10      |
| 001.202.10  | 45/40       | 50                        | 150±10            | 10      |
| 001.202.11* | 50/42       | 55                        | 150±10            | 10      |
| 001.202.12* | 55/44       | 60                        | 150±10            | 10      |



\* Non DIN



ENQUIRE

